

IP 65



A-9100
Plastic double sided diffuser

- | High technology LED luminaires
- | Low consumption
- | Self testing
- | Up to 3 hours autonomy duration
- | Maintained & non maintained operation
- | For central battery system (CBS)
- | LED life >75.000 hours
- | Suitable for open areas, corridors & escape marking sign
- | Fault and battery LED indicators
- | Easy installation / mounting.

The company is certified by



for a safer world!



www.olympia-electronics.gr

T. +30 23530 51200 | f. +30 23530 51486 | info@olympia-electronics.gr

■ WATERPROOF SELF-TESTING MAINTAINED LED EMERGENCY LUMINAIRES 220-240V AC

TECHNICAL SPECIFICATIONS	GR-1938/15L	GR-1938/30L	GR-1939/15L	GR-1939/30L
BATTERY	3,6V/600mAh Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/3Ah Ni-Cd
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	7VA	7,8VA	7,4VA	8,2VA
LIGHT OUTPUT	105/105 lm	210/210 lm	105/105 lm	210/210 lm

TECHNICAL SPECIFICATIONS	GR-1938/4P	GR-1938/6P	GR-1939/4P	GR-1939/6P
BATTERY	4,8V/1,5Ah Ni-Cd	4,8V/3Ah Ni-Cd	4,8V/3Ah Ni-Cd	4,8V/4Ah Ni-Mh
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	8,10VA	8,4VA	7,7VA	8,5VA
LIGHT OUTPUT	150/300 lm	225/450 lm	150/300 lm	225/415 lm

■ NON-MAINTAINED LED EMERGENCY LUMINAIRES 220-240V AC WITH INTERNAL JUMPER SELECTED MAINTAINED OPTION


TECHNICAL SPECIFICATIONS	GR-1935/15L	GR-1935/30L	GR-1936/15L	GR-1936/30L
BATTERY	3,6V/600mAh Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/1,5Ah Ni-Cd	3,6V/3Ah Ni-Cd
DURATION	1,5 h	1,5 h	3 h	3 h
CONSUMPTION	3VA	3VA	3VA	4VA
LIGHT OUTPUT	40/105 lm	40/210 lm	40/105 lm	40/210 lm

■ WATERPROOF CENTRAL BATTERY SYSTEM LED LUMINAIRES

TECHNICAL SPECIFICATIONS	GR-1926/15L	GR-1926/30L
VOLTAGE AC (50/60Hz)	100 - 265V	
VOLTAGE DC	50 - 385V	
CONSUMPTION	1,75W/2VA	2,9W/3,2VA
LIGHT OUTPUT	105 lm	210 lm

■ WATERPROOF CENTRAL BATTERY SYSTEM LED LUMINAIRES

TECHNICAL SPECIFICATIONS	GR-1926/15L/24V	GR-1926/30L/24V
VOLTAGE AC (50/60Hz)	17 - 27V	
VOLTAGE DC	12 - 27V	
CONSUMPTION	1,5W/1,8VA	2,5W/2,8VA
LIGHT OUTPUT	105 lm	210 lm

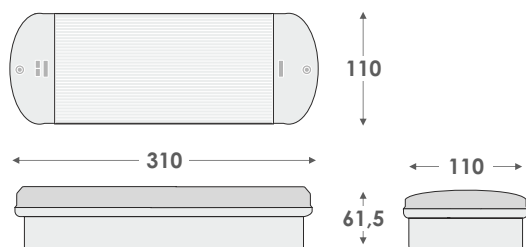

Distributor